

#### Standard Features

- **Print, Fold and Seal:** One-step process eliminates excess document handling
- **Document Security:** Enclosed paper path from the printer to pressure sealer ensures security. Ideal for PIN notices or other confidential applications
- **Form Capabilities:** Processes forms up to 14" in length
- **Printer Compatibility\*:** Designed to work with HP/Troy P2015, P3005, P4014, 4200, 4250 & 4350 and Lexmark/Source T640 laser printers. A list of other compatible models is available.
- **Installation:** Easy to install, no software required
- **Alignment Base:** Special alignment base holds the printer and pressure sealer securely and slides apart for easy access to the paper path and fold plates
- **Fold Types:** Folds Z, C\*\*, Half and custom folds
- **LED Control Panel:** Notifies operator when the power is on, a cover is open, the paper runs out, or if a fault occurs
- **Fault Detector:** Detects double feeding and any faults
- **Dedicated Use:** Designed for in-line use only
- **Six-Digit Resettable Counter**

#### Options:

- **P2000IL:** Cost-saving package that includes FD 2000IL System, 18" conveyor and 2 cabinets
- **4' High-Capacity Conveyor w/Photo Eye:** Allows for neat and sequential stacking of up to 1,500 processed forms
- **18" Conveyor w/Photo Eye:** Allows for neat and sequential stacking
- **Locking Cabinets:** Fully enclosed for storage (2 cabinets required)

\* See reverse for complete printer specifications

\*\* C-Fold bottom check position only



FD 2000IL System shown with IL Pressure Sealer and IL Alignment Base, laser printer (not included), optional conveyor and optional locking cabinets

#### Secure Processing of One-Piece Mailers

The FD 2000IL System allows operators to print, fold and seal pressure-sensitive one-piece mailers in one step, reducing processing time while increasing document security. The IL System works in-line with model-specific MICR and Non-MICR desktop laser printers. The fully-enclosed paper path is designed to conceal confidential documents, including PIN notices, checks, school grade reports and health care information.

The IL System incorporates the industry-leading FD 2000 AutoSeal<sup>®</sup> which features a user-friendly LED control panel and pre-marked fold settings for 11" and 14" standard forms. The FD 2000IL is ideal for companies processing sensitive documents or those looking for a mid-volume in-line solution for processing pressure seal forms.

## Flexible


The FD 2000IL System handles a variety of documents up to 8.5" x 14" including checks, invoices, school reports, tax forms and appointment notices. Pressure seal mailers can be used for virtually any application that can be printed on one form.

## Easy to Operate

The AutoSeal® IL System is easy to install. An IL-compatible desktop laser printer (see Specifications, below) is placed on the IL-Alignment Base with the FD 2000IL pressure sealer using placement guides to ensure proper alignment. The IL Alignment Base incorporates an easy-pull system which allows the printer to be pulled away from the FD 2000IL to provide convenient access to the paper path and fold plates.

## Powerful

The FD 2000IL processes up to 50,000 forms per month in a compact and powerful design. The user-friendly control panel features LED indicators and a six-digit resettable counter. The FD 2000IL is built in the USA with proven Formax strength and reliability.

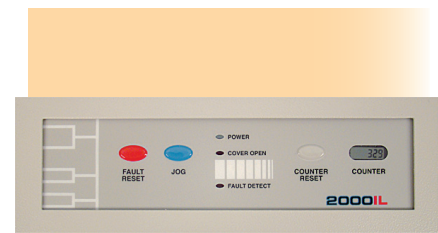


User Friendly Control Panel



Enclosed paper path provides optimal document security

## Pressure Seal Solution

The AutoSeal® FD 2000IL System, combined with a laser printer and pressure seal forms, creates a secure, time-saving and efficient solution for paper processing.



Standard "Z" Fold Process

## Specifications:

Printer Compatibility:	HP/Troy P3005, 4200, 4250, 4350 with two 500-sheet trays HP/Troy P2015, with two 250-sheet trays (requires FD 2000-45IL Riser) HP/Troy P4014, with one 500-sheet tray (requires FD 2000-47IL Riser) Lexmark/Source T640, with one 500-sheet tray (requires FD 2000-46IL Riser) Xerox Phaser 4510 (requires FD 2000-55IL printer adapter kit)
Fold Types:	Z & V (all applications), C (bottom check position only)
Speed:	Printer dependent
Paper Size:	Up to 8.5" W x 14" L
Power:	FD Model: 120 Volts AC, 50/60 Hz FE Model: 220 Volts AC, 50/60 Hz
Duty Cycle:	Up to 50,000 pieces per month
Dimensions (closed) **:	19" W x 46" L x 23" H
Dimensions w/18" Conveyor (closed):	19" W x 65" L x 23" H
Tabletop Area Required:	20" W x 43" L
Tabletop Area Required w/18" Conveyor:	20" W x 69" L
Dimensions w/Cabinets & 18" Conveyor:	20" W x 74" L x 48" H

\*\* Dimensions include IL Pressure Sealer and IL Alignment Base (both included) and laser printer (not included in system)



FD 2000-45IL Riser with HP/Troy P2015 Printer



Standard Catch Tray